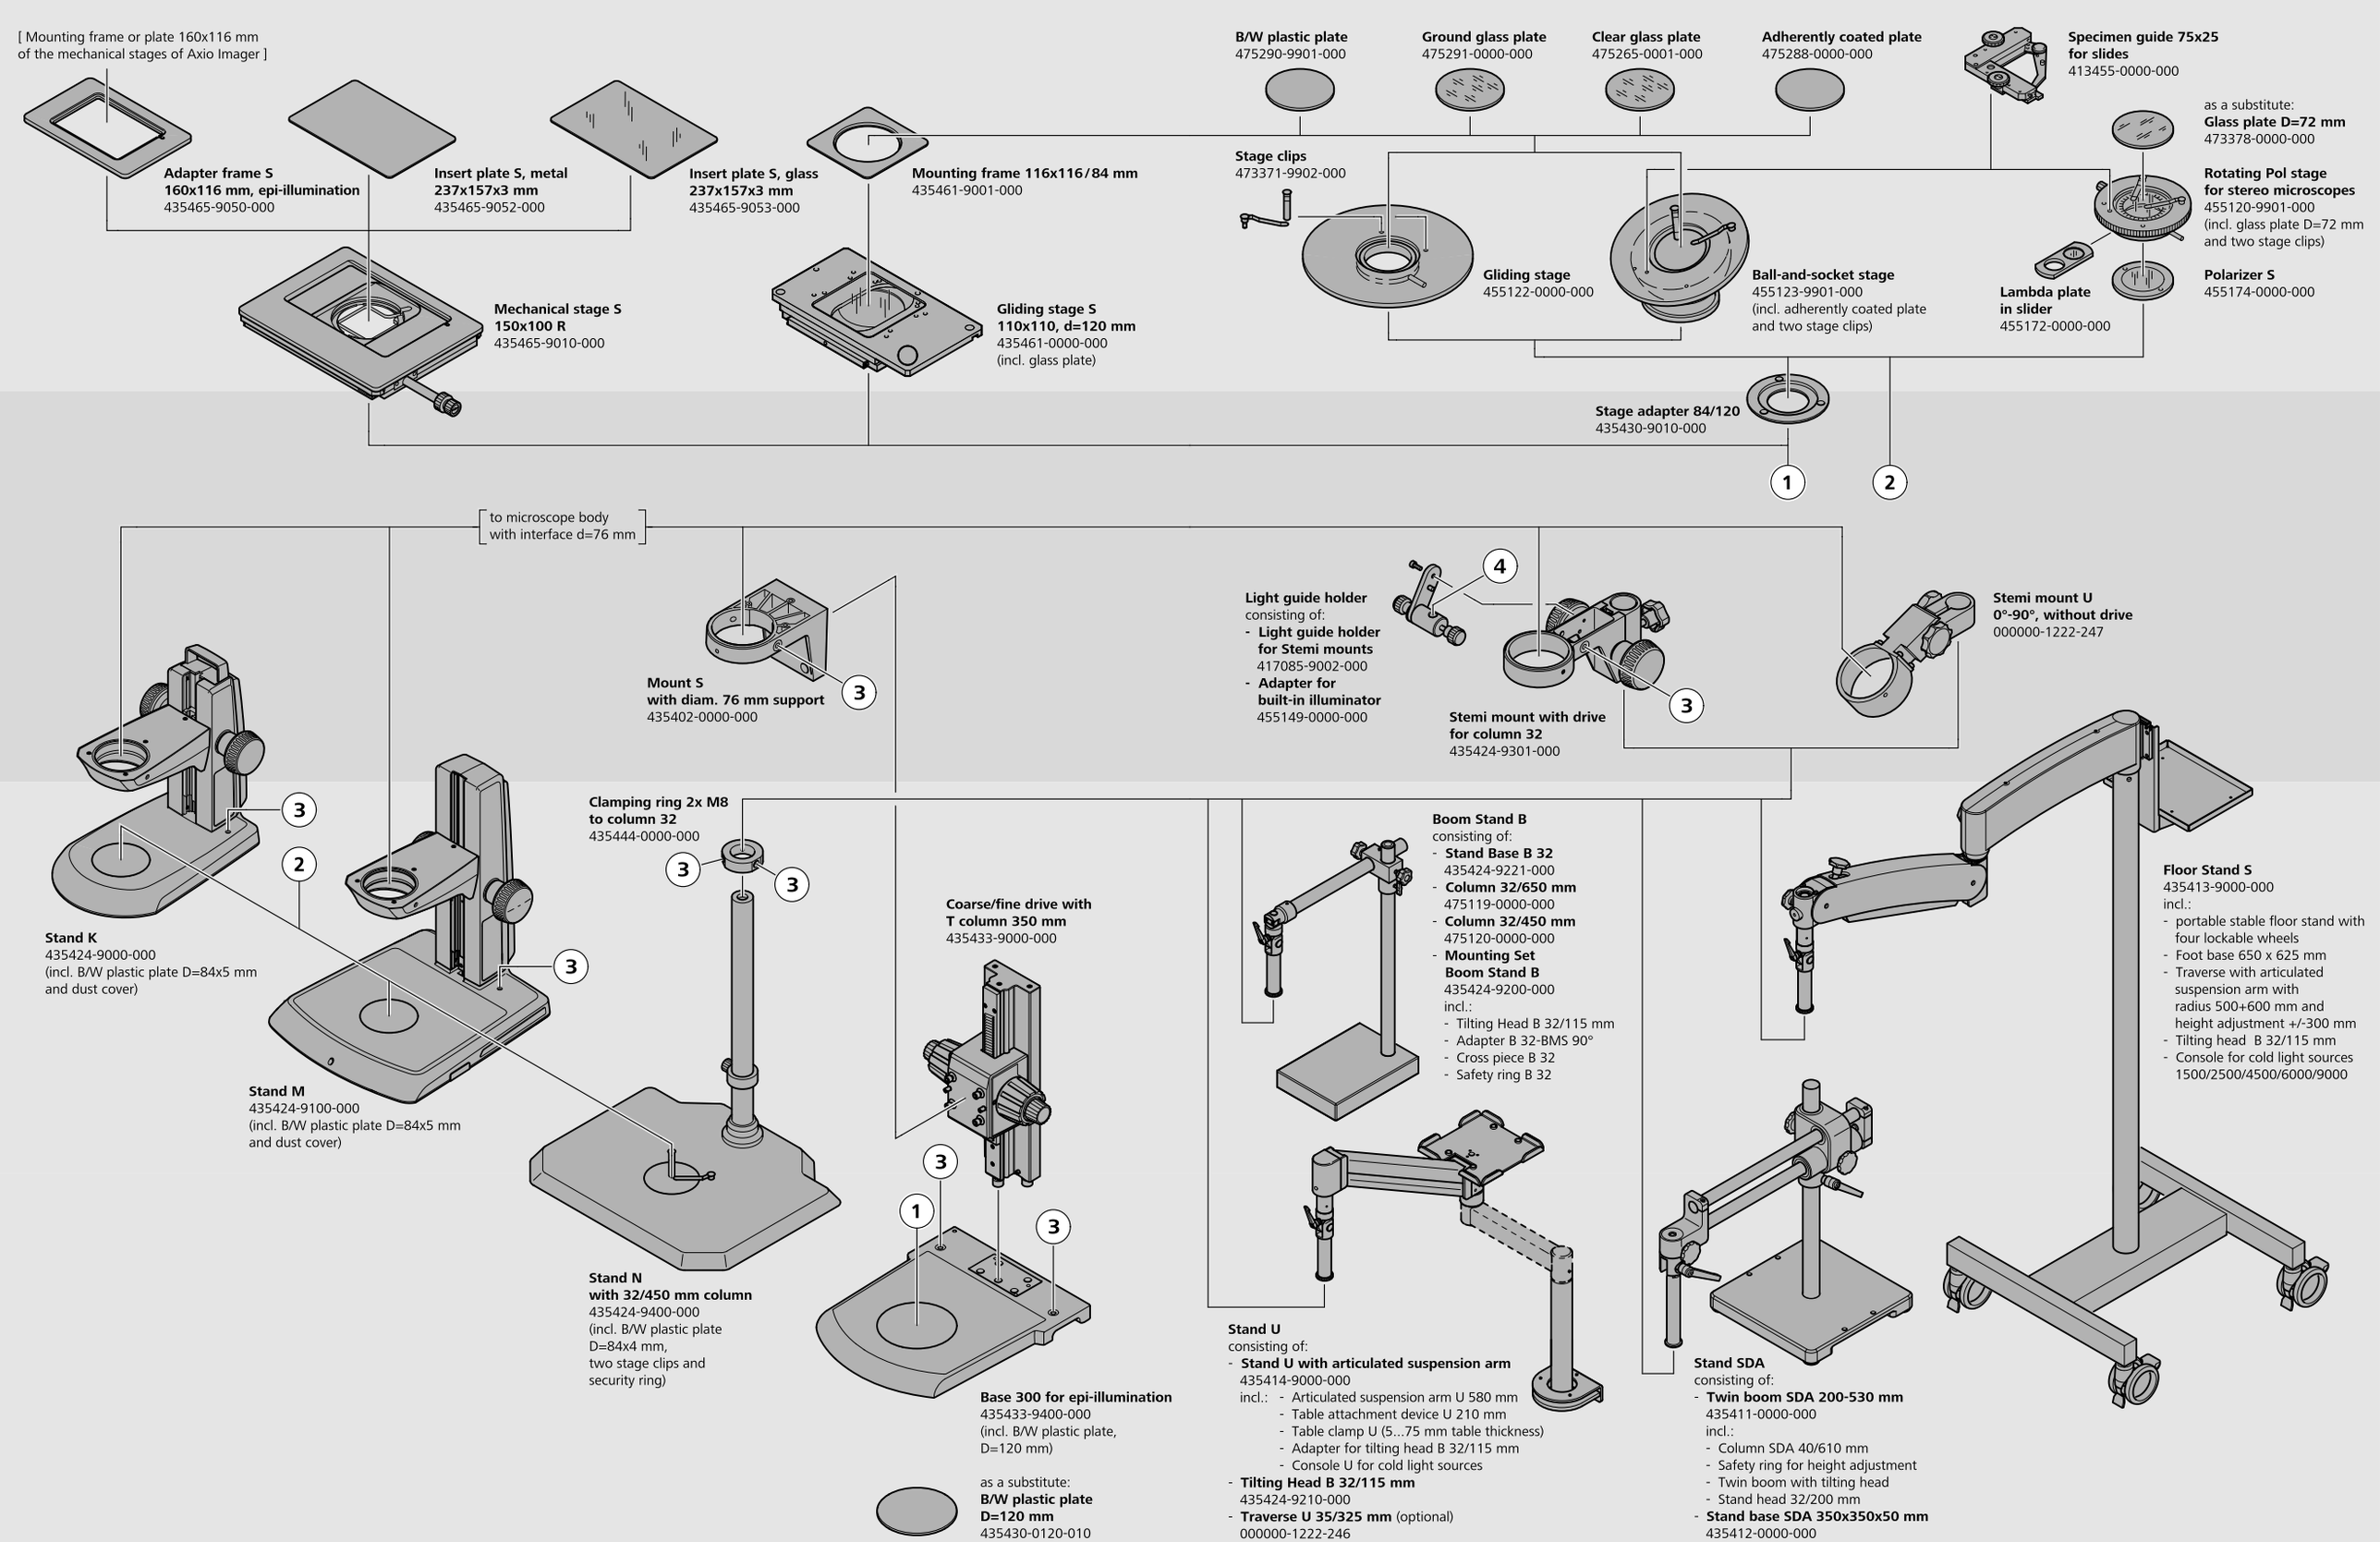
[Mounting frame or plate 160x116 mm of the mechanical stages of Axio Imager]
Adapter frame S 160x116 mm, epi-illumination 435465-9050-000
Insert plate S, metal 237x157x3 mm 435465-9052-000
Insert plate S, glass 237x157x3 mm 435465-9053-000
Mounting frame 116x116/84 mm 435461-9001-000
Mechanical stage S 150x100 R 435465-9010-000
Gliding stage S 110x110, d=120 mm 435461-0000-000 (incl. glass plate)
B/W plastic plate 475290-9901-000
Ground glass plate 475291-0000-000
Clear glass plate 475265-0001-000
Adherently coated plate 475288-0000-000
Specimen guide 75x25 for slides 413455-0000-000
Stage clips 473371-9902-000
Gliding stage 455122-0000-000
Ball-and-socket stage 455123-9901-000 (incl. adherently coated plate and two stage clips)
as a substitute: Glass plate D=72 mm 473378-0000-000
Rotating Pol stage for stereo microscopes 455120-9901-000 (incl. glass plate D=72 mm and two stage clips)
Lambda plate in slider 455172-0000-000
Polarizer S 455174-0000-000
Stage adapter 84/120 435430-9010-000
1
2
to microscope body with interface d=76 mm
Mount S with diam. 76 mm support 435402-0000-000
3
Light guide holder consisting of:
- Light guide holder for Stemi mounts 417085-9002-000
- Adapter for built-in illuminator 455149-0000-000
4
Stemi mount with drive for column 32 435424-9301-000
Stemi mount U 0°-90°, without drive 000000-1222-247
Stand K 435424-9000-000 (incl. B/W plastic plate D=84x5 mm and dust cover)
Stand M 435424-9100-000 (incl. B/W plastic plate D=84x5 mm and dust cover)
Clamping ring 2x M8 to column 32 435444-0000-000
Stand N with 32/450 mm column 435424-9400-000 (incl. B/W plastic plate D=84x4 mm, two stage clips and security ring)
Coarse/fine drive with T column 350 mm 435433-9000-000
Base 300 for epi-illumination 435433-9400-000 (incl. B/W plastic plate, D=120 mm)
as a substitute: B/W plastic plate D=120 mm 435430-0120-010
Boom Stand B consisting of:
- Stand Base B 32 435424-9221-000
- Column 32/650 mm 475119-0000-000
- Column 32/450 mm 475120-0000-000
- Mounting Set Boom Stand B 435424-9200-000 incl.:
- Tilting Head B 32/115 mm
- Adapter B 32-BMS 90°
- Cross piece B 32
- Safety ring B 32
Stand U consisting of:
- Stand U with articulated suspension arm 435414-9000-000 incl.:
- Articulated suspension arm U 580 mm
- Table attachment device U 210 mm
- Table clamp U (5...75 mm table thickness)
- Adapter for tilting head B 32/115 mm
- Console U for cold light sources
- Tilting Head B 32/115 mm 435424-9210-000
- Traverse U 35/325 mm (optional) 000000-1222-246
Floor Stand S 435413-9000-000 incl.:
- portable stable floor stand with four lockable wheels
- Foot base 650 x 625 mm
- Traverse with articulated suspension arm with radius 500+600 mm and height adjustment +/-300 mm
- Tilting head B 32/115 mm
- Console for cold light sources 1500/2500/4500/6000/9000
Stand SDA consisting of:
- Twin boom SDA 200-530 mm 435411-0000-000 incl.:
- Column SDA 40/610 mm
- Safety ring for height adjustment
- Twin boom with tilting head
- Stand head 32/200 mm
- Stand base SDA 350x350x50 mm 435412-0000-000